


S. G. BAKER LTD.

Guidelines for the effective use of Sandbags

It's more than just filling sandbags, stacking them up and building walls and barriers.



Using sandbags which are properly filled and placed can effectively divert water around instead of through buildings. Sandbags do not, however, guarantee a water-tight seal.

A correctly filled sandbag should only be filled $\frac{1}{2}$ to $\frac{2}{3}$ full, and tied near the top. This allows the sand inside the sandbag to move and mould against the ground or other sandbags when they are laid on top of each other. Our sandbags are filled with 15kg of sharp sand, which enables the moulding to be made as the wall is built. For better sealing and stability the sandbags should be overlapped as the wall is built.

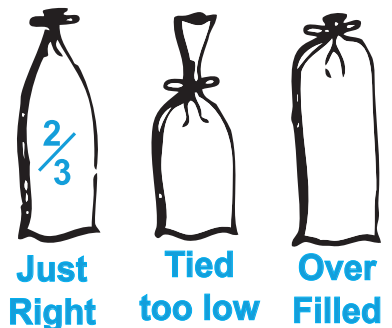

Doorways

Doorways can be effectively sealed by laying a sheet of plastic or canvas before building the sandbag barrier, and then folding the plastic round the ends of the barrier as it is built up, then over the top and held down by additional sandbags.

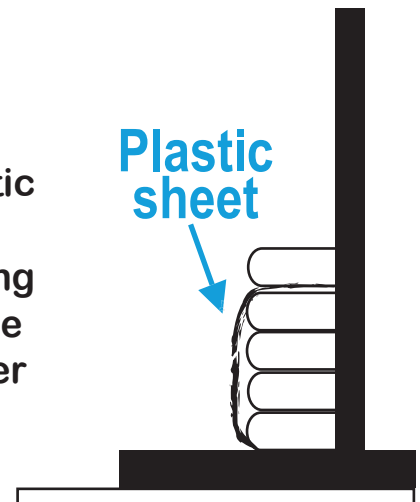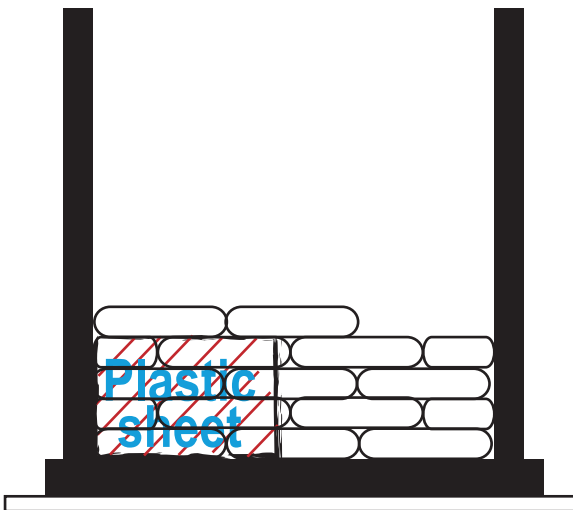

To buy sandbags to protect your home or business please visit

www.BuySandBagsNow.com

SG Baker Ltd, Old Wharf Road, Grantham, Lincs, NG31 7AA